



Maxlok® 1901

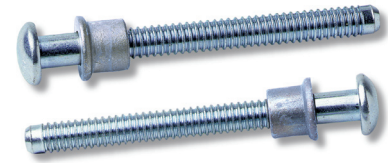

English	Français	Deutsch	Italiano	Español
Brazier head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Pin: Medium carbon steel* Zinc plated, thickness 8 µm Clear trivalent passivated	Tige: Acier* Revêtement zingué, épaisseur 8 µm Passivation claire trivalente	Bolzen: Stahl* Verzinkt, 8 µm Klar chromatiert, Cr6-frei	Bullone: Acciaio a carbonio* Zincatura spessore 8 µm Passivazione chiara trivalente	Vástago: Acero medio al carbono* Zincado, 8 micras Pasivado claro trivalente
Collar: Low carbon steel** Zinc plated, thickness 8 µm Clear trivalent passivated	Bague: Acier bas carbone** Revêtement zingué, épaisseur 8 µm Passivation claire trivalente	Schließring: Stahl** Verzinkt, 8 µm Klar chromatiert, Cr6-frei	Collare: Acciaio a basso tenore di carbonio** Zincatura spessore 8 µm Passivazione chiara trivalente	Collar: Acero bajo en carbono** Zincado, 8 micras Pasivado claro trivalente

*: BS 3111 Type 10, SAE 10B35 DIN 1654, 35B2 **: SAE 1008 EN 10263-2 C8C

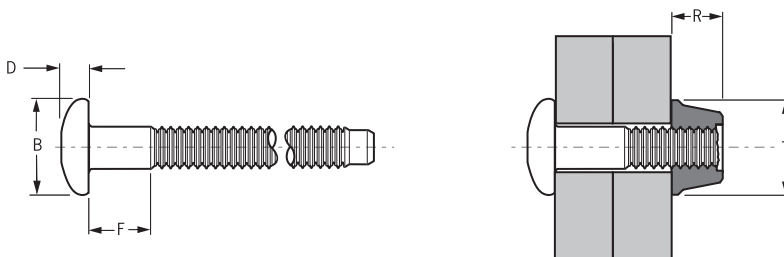

ø	Thread		B	D	F	R	T	Pin	Collar	Part No/ref	Part No/ref	
	min.	max.										max.
4.8 (3/16")	1.6	15.9	5.16	10.1	3.2	2.3	8.7	10.1	8.25	10.01	01901-70610	01981-70600
	7.9	31.7									8.4	
6.4 (1/4")	1.6	15.9	6.75	13.3	3.9	2.2	13.5	13.2	11.79	16.01	01901-70810	01981-70800
	7.9	31.7									9.1	

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Maxlok® is a trademark of Avdel UK Limited

03.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.